

Dicolor LED 深德彩

MS

Outdoor Series

Innovative DOOH LED Display





Fast
Assembly



Long
Life-span



Front
Service



High
Heat Dissipation



Standardization



Simplicity



90° Splicing



Safety



Standardized Size

The standard size of cabinet is one square meter

Reduce transportation and installation costs



Splicing Gap
0.01m

High Precision, Seamless

The frame is integrally formed with die-casting material

Anti-deformation module kit with higher precision




Standardization

The hole size of the module with different pixel pitch is the same, which can be directly replaced

90° Splicing

Optional beveled cabinet, Support 90° splicing

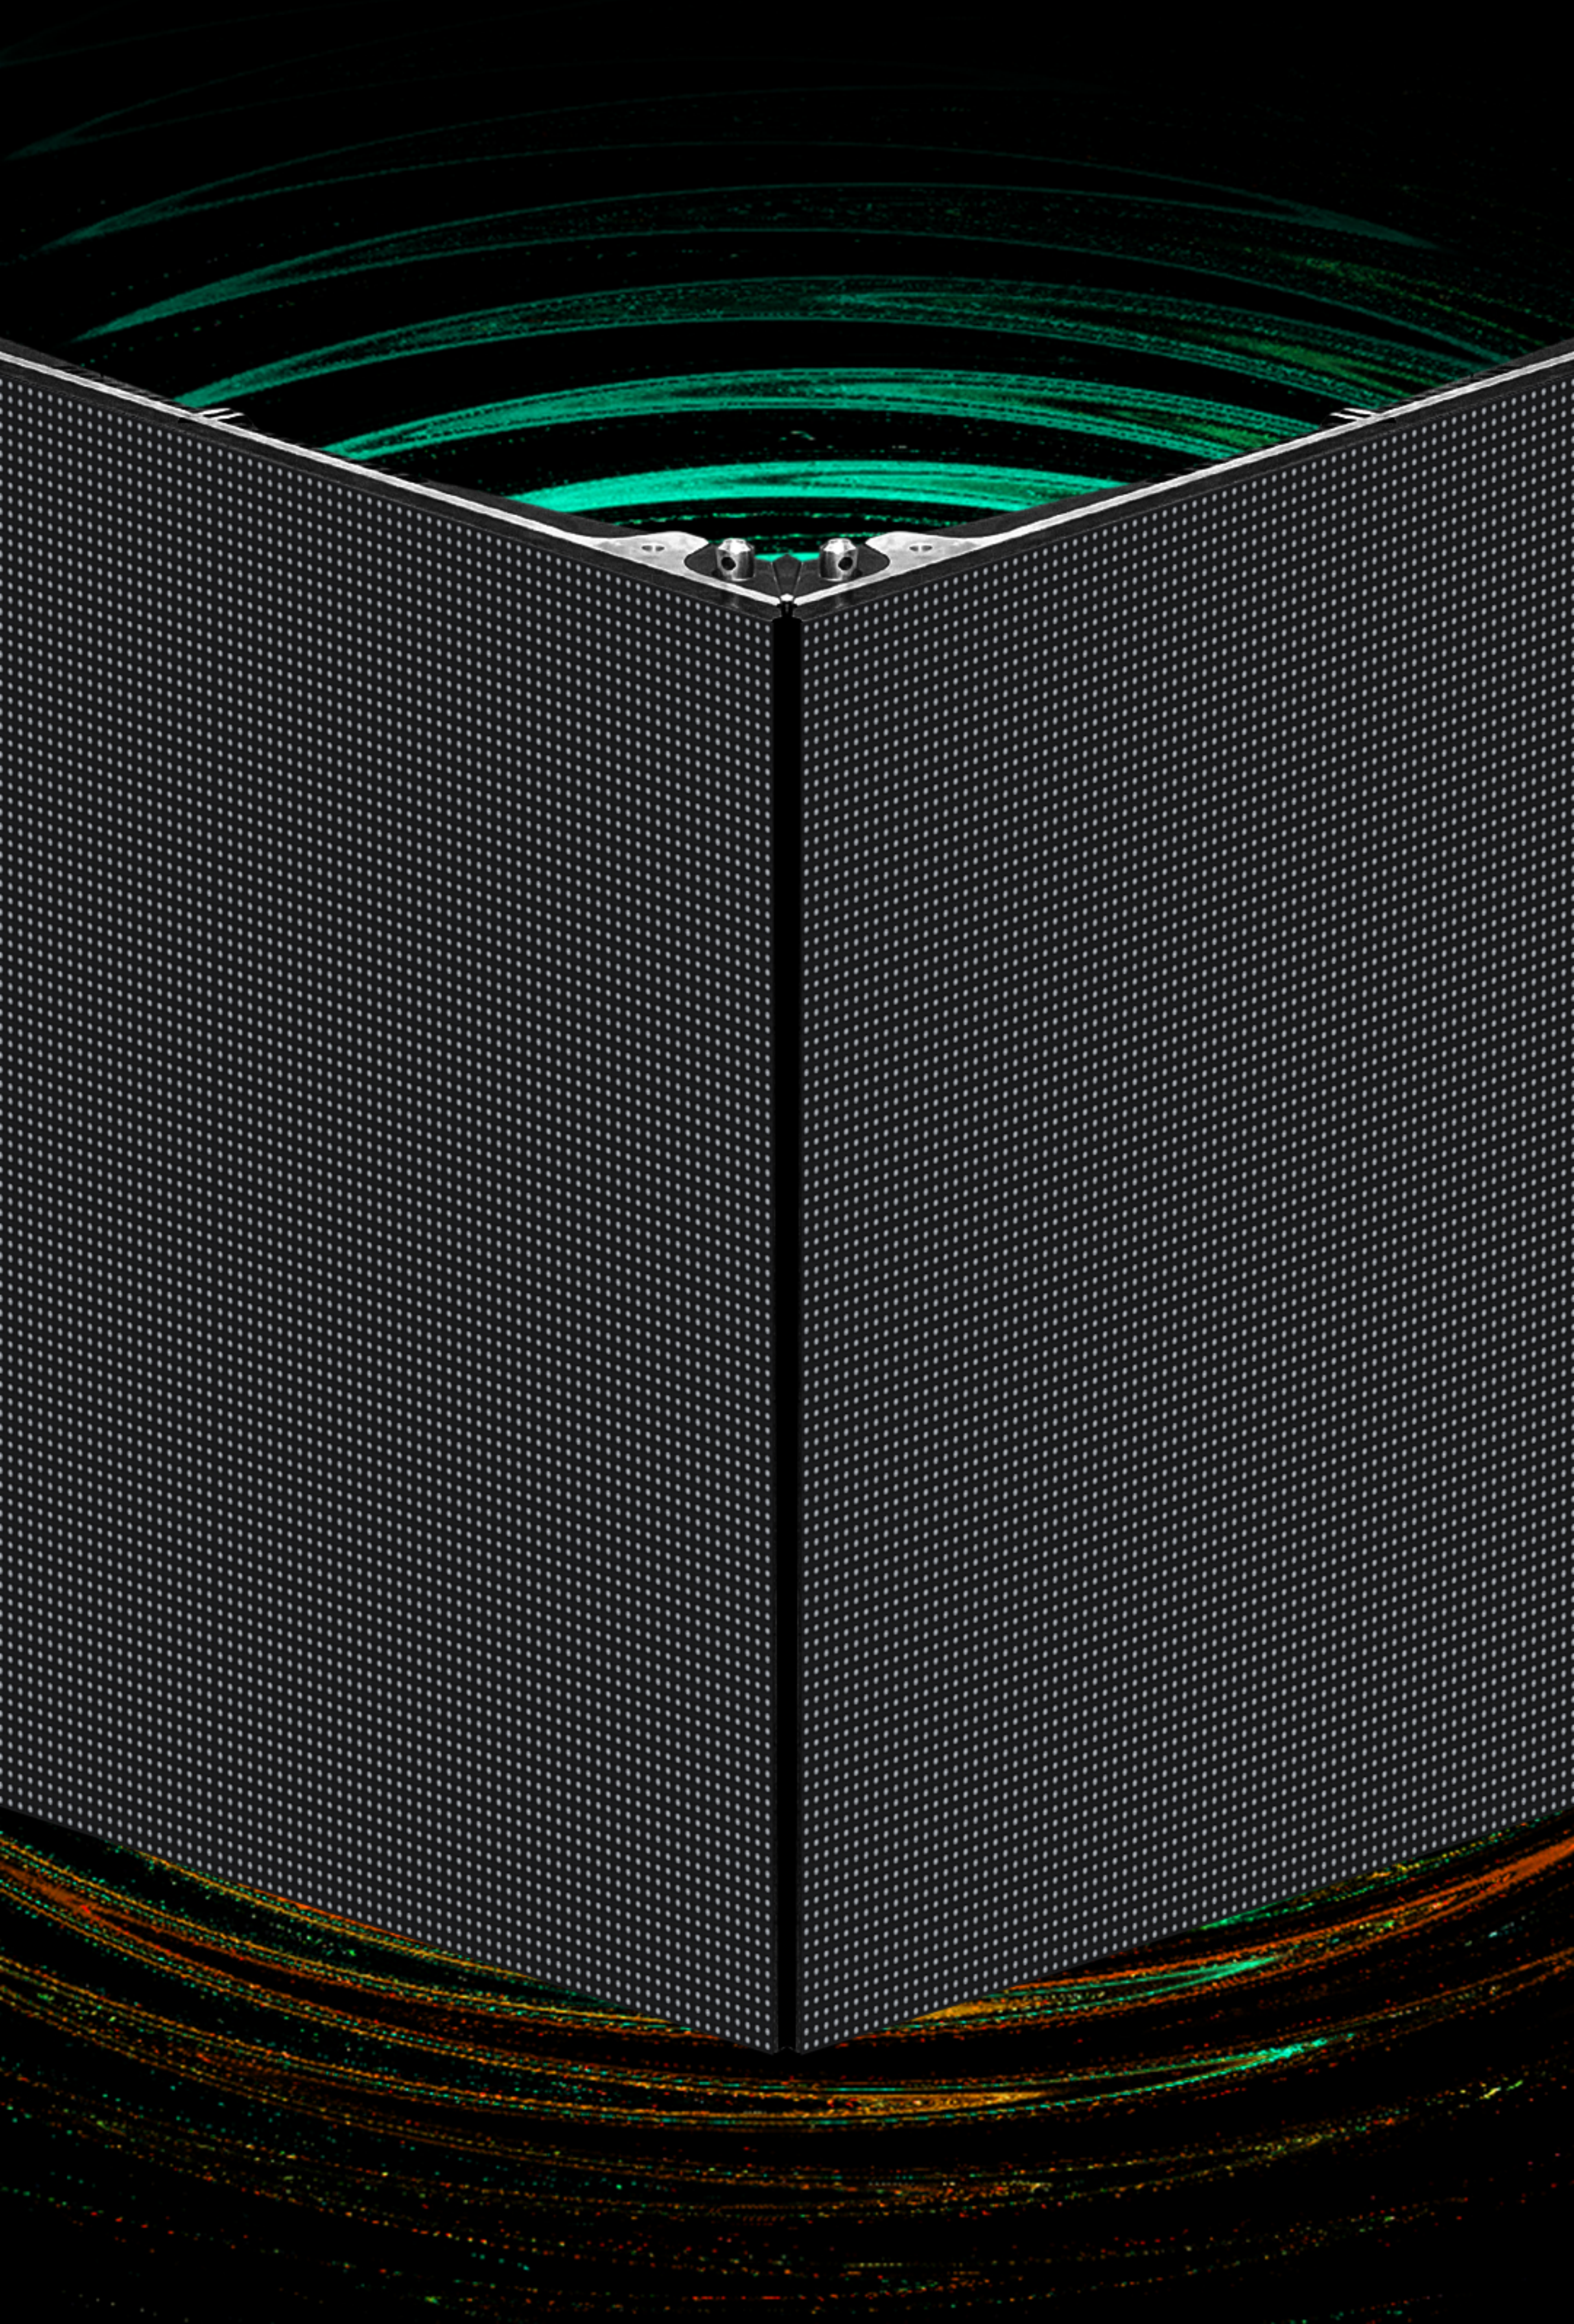

Super Convenient

Full front maintenance design

The module, power supply and receiving card
can be maintained from the front side



Power and signal aerial plug wire connection,
Convenient and fast

High Protection, All-weather Friendly

High protection level for outdoor harsh environment




IP65


**INGRESS
PROTECTION**

(*IP65, Completely prevent dust from entering,
Low pressure spray at any angle has no effect)


High Heat Dissipation

Die-cast aluminum cabinet, good self-heating performance,
no need to install air conditioner, no need for edge decoration,
saving steel structure

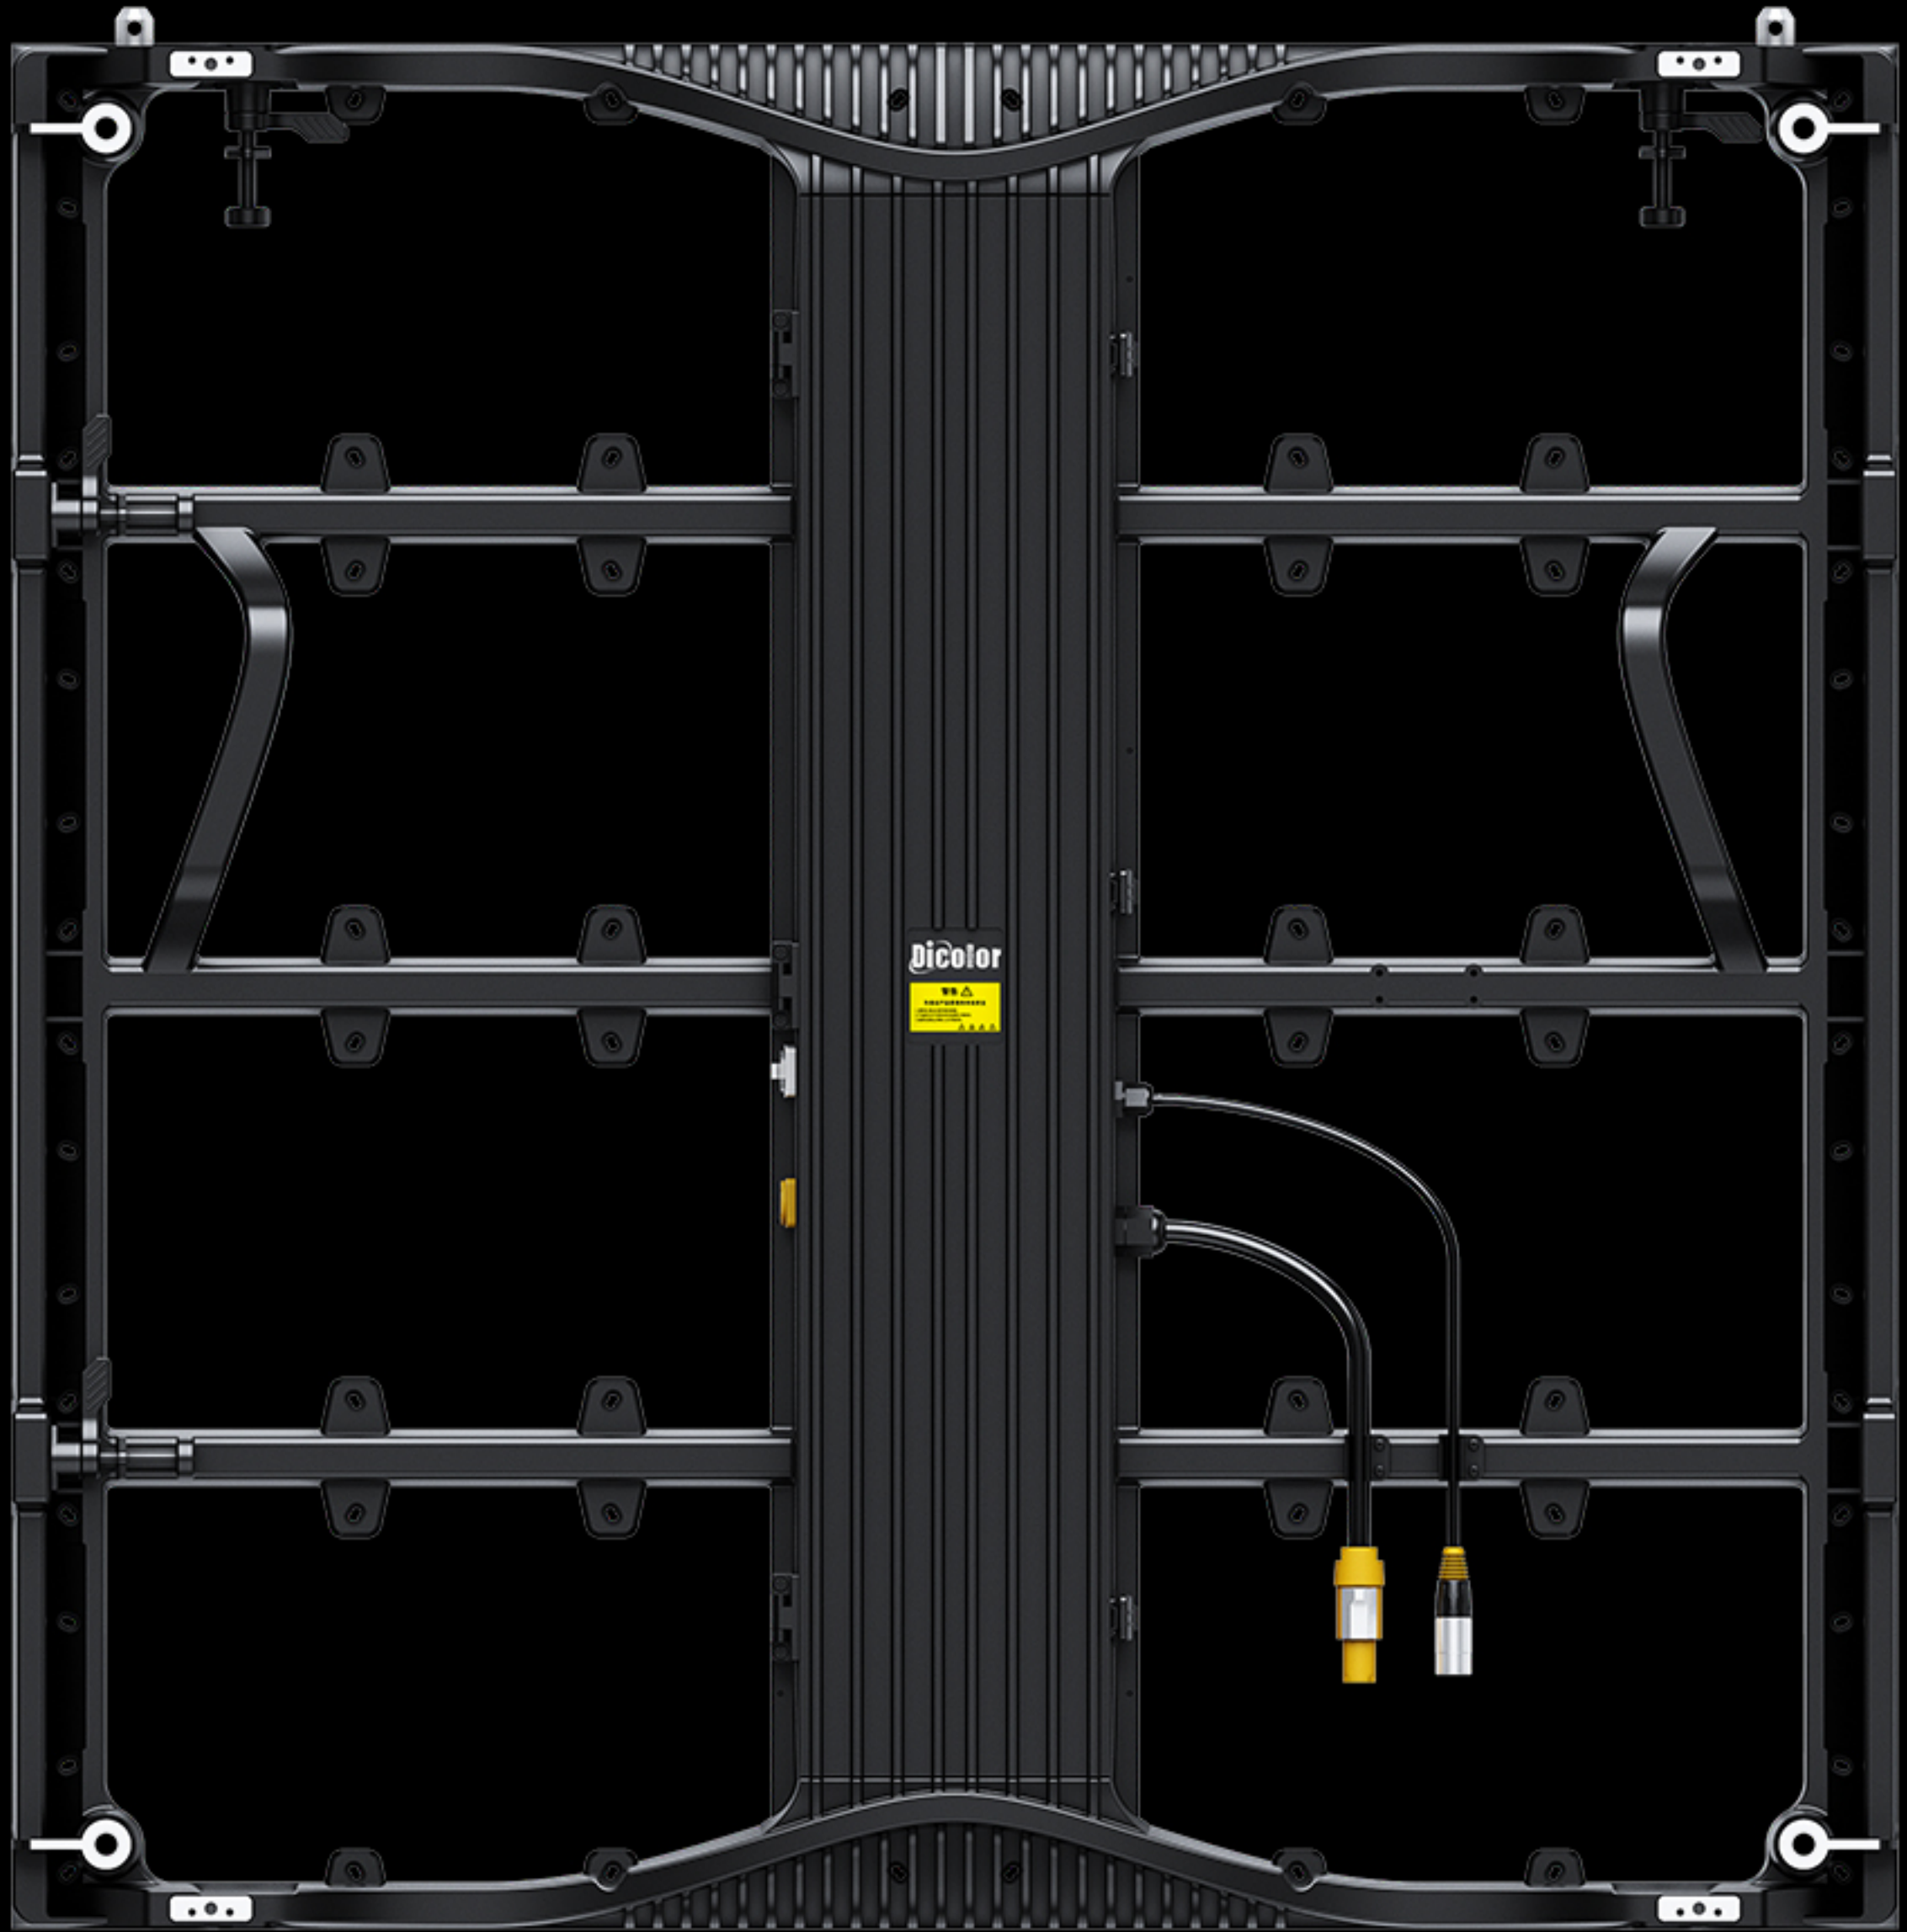

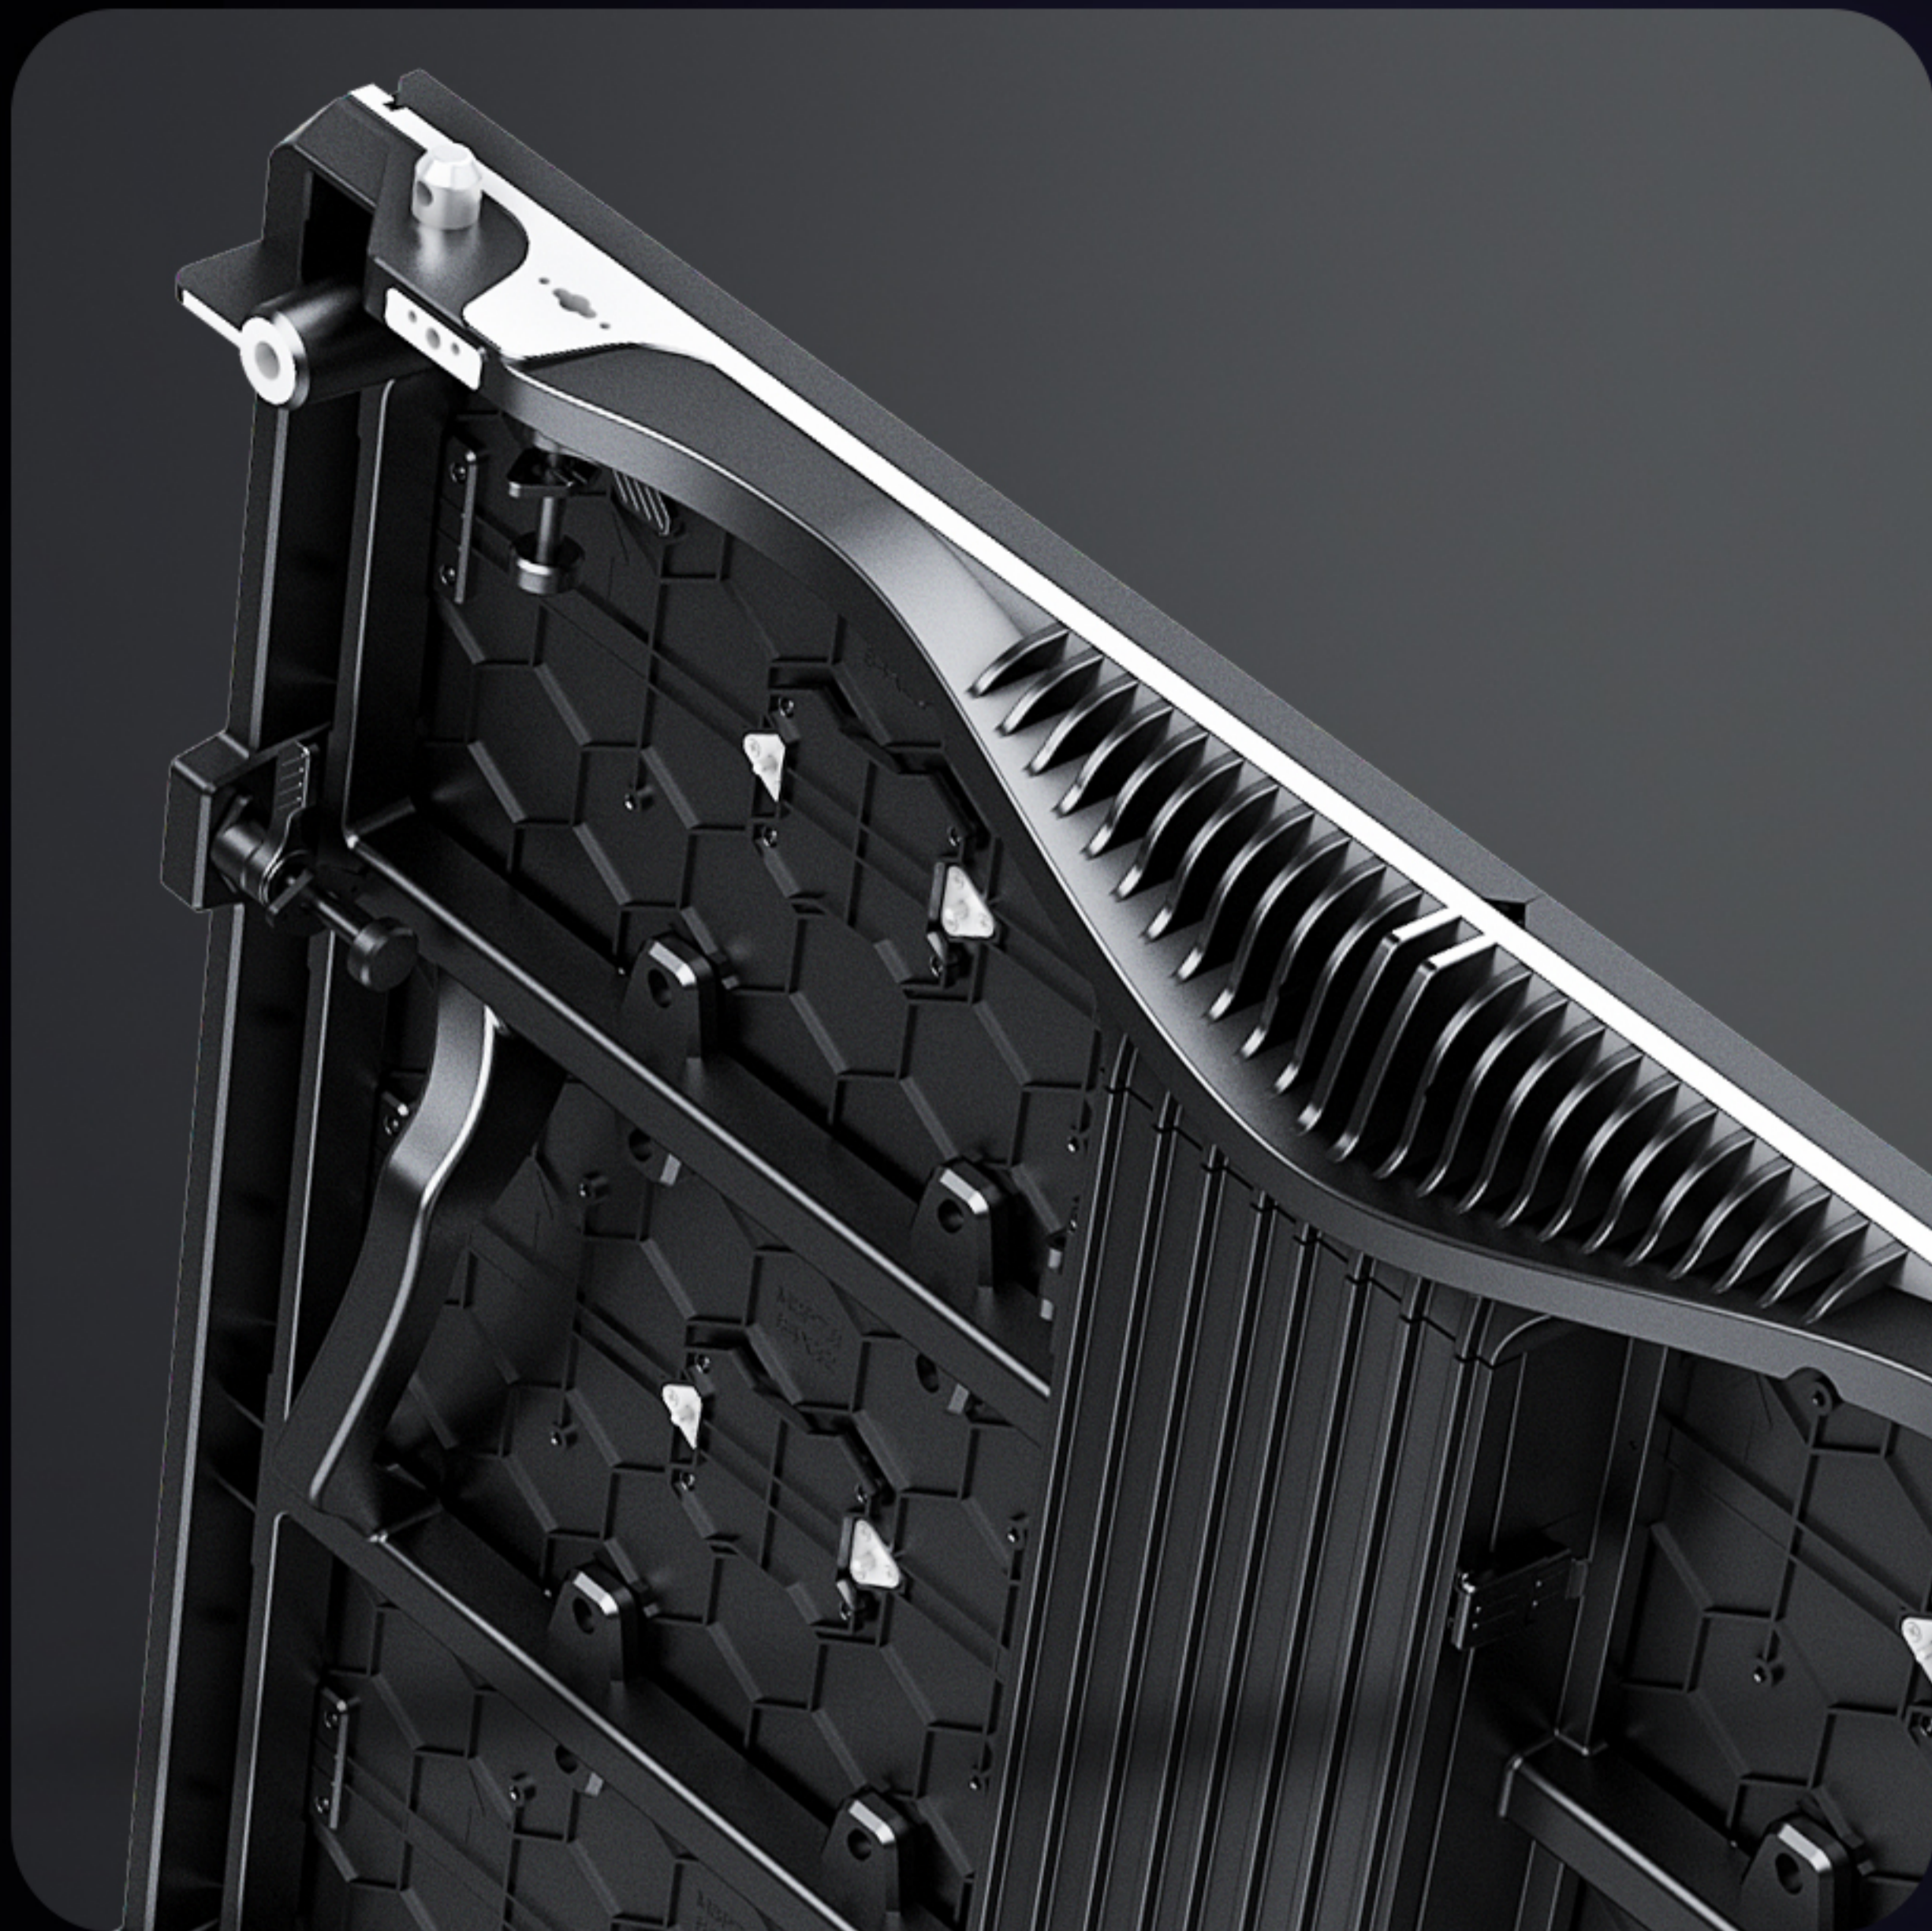

Appearance

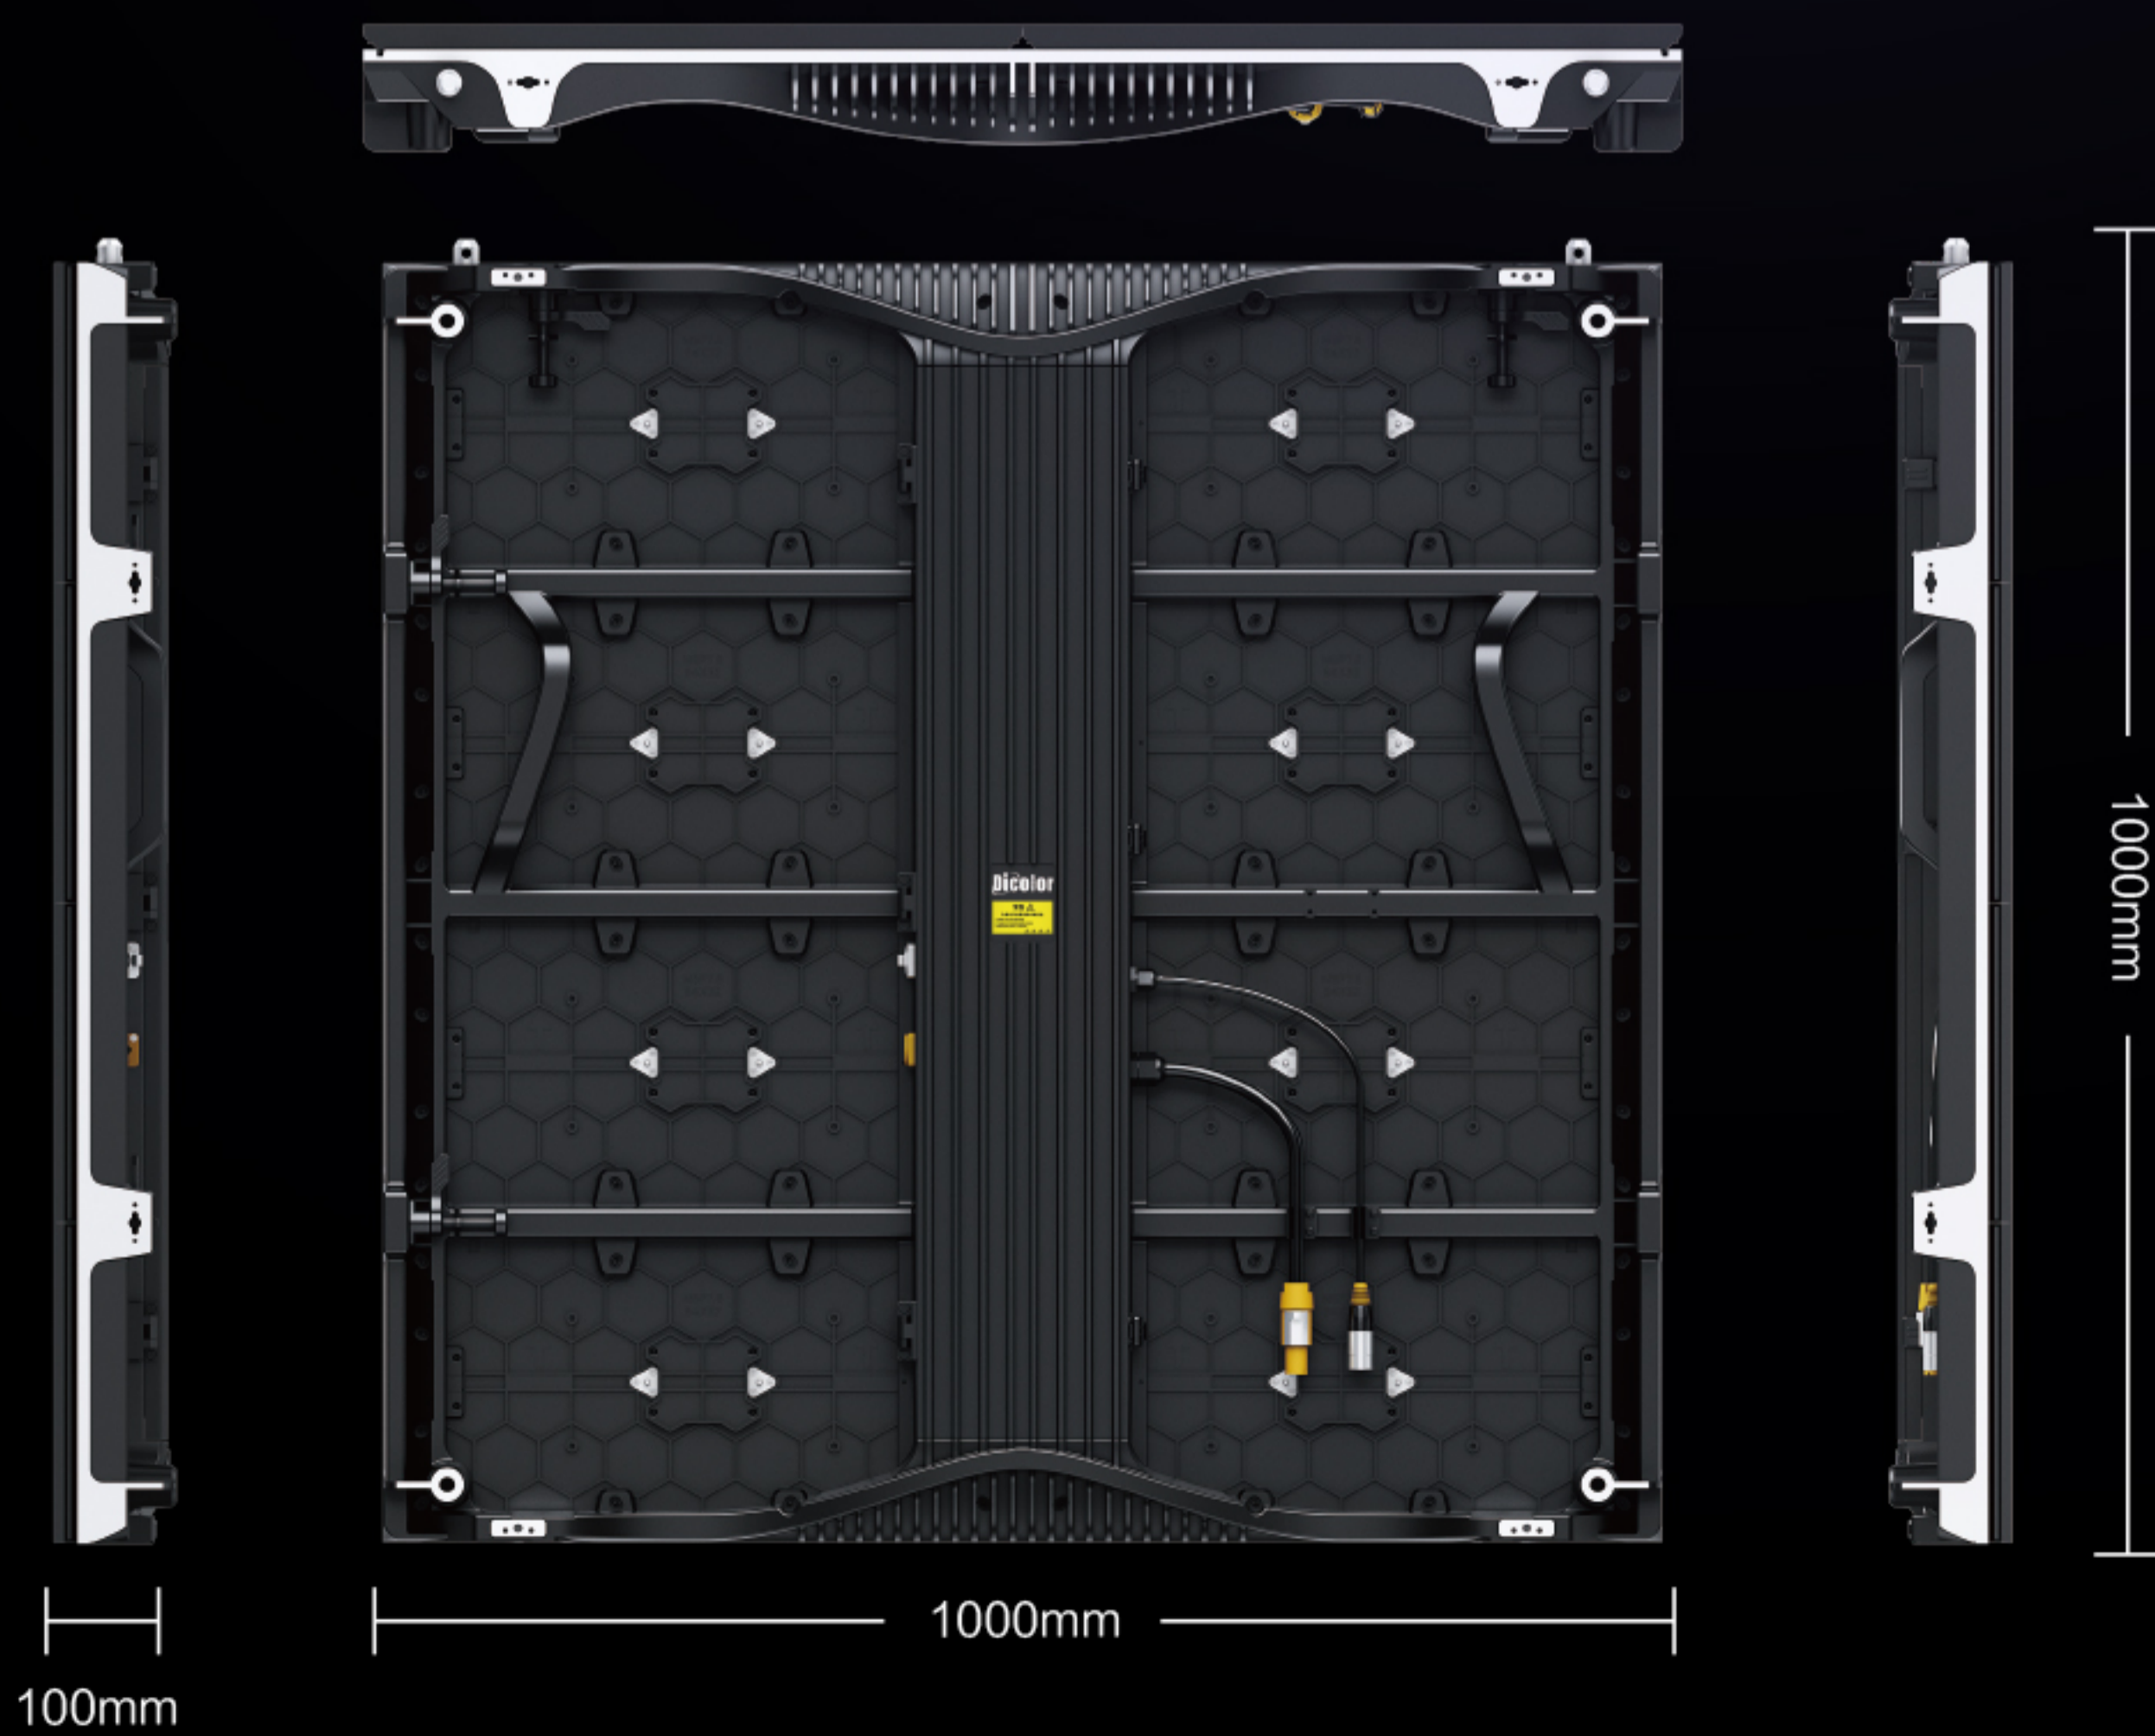

MS Outdoor Series

Product specifications

Product	MS-480	MS-780	MS-100
Pixel Pitch (mm)	4.81	7.81	10.41
Cabinet size (WxHxD/mm)	1000x1000x100	1000x1000x100	1000x1000x100
Cabinet Resolution	208x208	128x128	96x96
Cabinet Weight (Kg)	31	31	29.1
Brightness (Nits)	5000	5500	6000
Refresh Rate (Hz)	≥1920	≥1920	≥3840
Gray Scale (Bit)	14	14	14
IP Rating (Front/Rear)	IP65/IP54	IP65/IP54	IP65/IP54
Max./Avg Power Consumption(W/m ²)	820/274	824/275	900/300

Dicolor

Shenzhen Dicolor Optoelectronics Co.,Ltd.

Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street,
Guangming District, Shenzhen, China

Tel: +86-755-33691736 Fax: -86-755-29604042

E-mail: inquiry@dicolor.cn Website: www.dicolor.cn



400-6645-658