

TO BE THE FOREUNNER OF
LED DISPLAY INDUSTRY

Dicolor LED

UT SERIES

Enjoy the Beauty Comes From it's
Transparency and Light Design

UT SERIES

Enjoy the Beauty Comes From it's
Transparency and Light Design



Lightweight design



Higher transparency rate



Super convenient installation
and maintenance



40%
transparency rate



For indoor and
outdoor applications



Multi-function
splicing installation

Dicolor LED

Shenzhen Dicolor Group Co., Ltd


Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street,
Guangming District, Shenzhen, China
Tel: +86-755-3369 1736 E-mail: inquiry@dicolor.cn
Website: www.dicolor.cn / www.dicolorled.com



02.2023

Shenzhen Dicolor Group Co., Ltd

Appearance

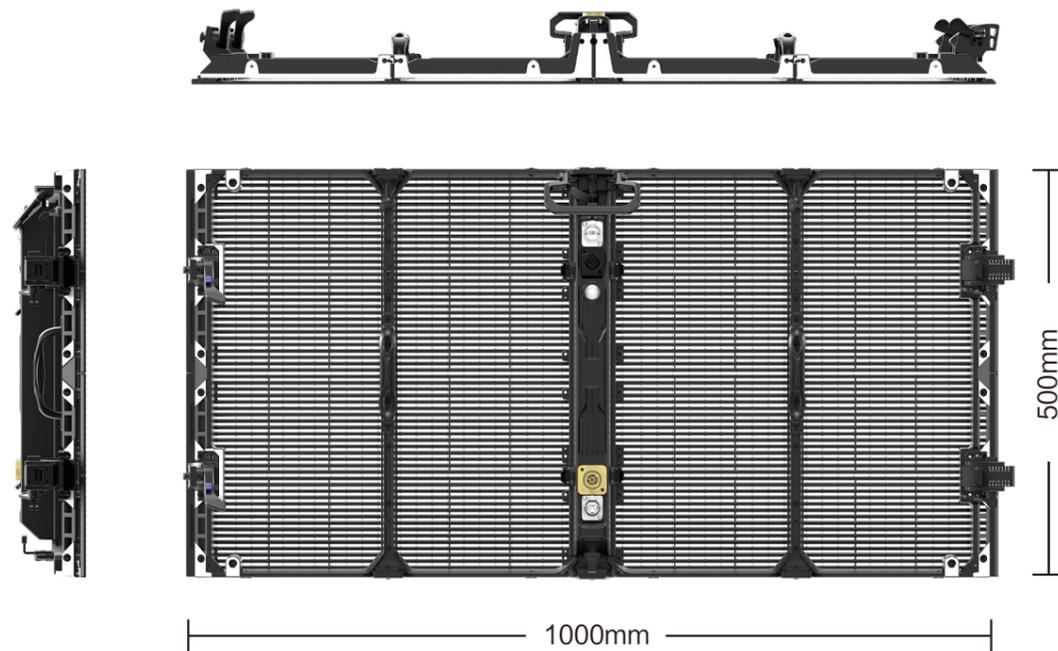


Product Specifications

Product	UT-390
Pixel Pitch (mm)	3.91-7.81
Cabinet size (WxHxD/mm)	1000×500
Cabinet Resolution	256×64
Cabinet Weight (Kg)	6.5
Brightness (Nits)	2500-3000
Gray Scale (Bit)	14
Refresh Rate (Hz)	≥3840
Max./Avg Power Consumption(W/m2)	416/139
IP Rating (Front/Rear)	IP65/IP54

Lightweight design


The weight of one cabinet is only 6.5kg, leading the industry design , save installation time and labor cost.

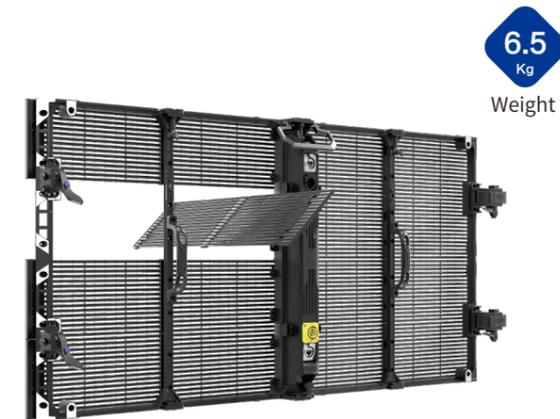

Super convenient installation and maintenance


The integrated design of the control box enables fast maintenance.

Each cabinet independently design, which can easily take out even during events and improve the miantence efficiency.

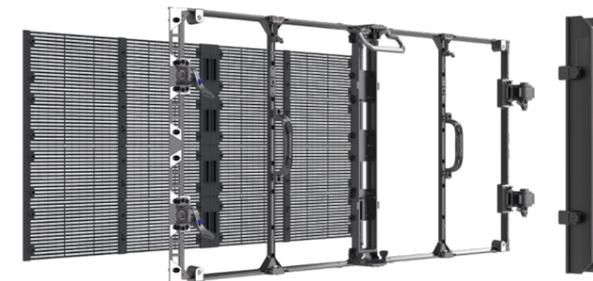

For indoor and outdoor applications

The use of a dedicated driver chip can effectively reduce grayscale loss at low brightness, and one product has two benefits.

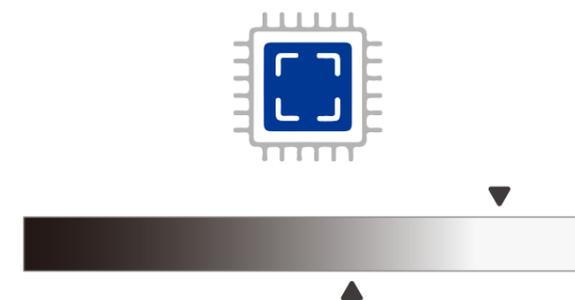


Higher transparency rate

The transparency rate is 40%,Lower wind resistance,Get the perfect combination of stage and art.



Multi-function splicing installation

The product supports internal and external right-angle splicing, dislocation splicing, and curve splicing to meet your creative display needs.

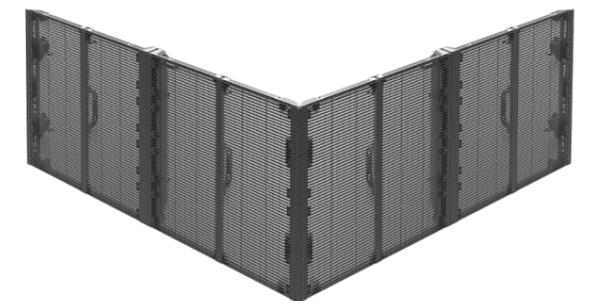

The brightness can be adjusted arbitrarily between 800-3000nit, the grayscale is unchanged, and keep color uniformity. The protection level reaches IP65 which fully meet the requirements of both indoor and outdoor application.

